

# Shannon



SCAN HERE

## Versatile smooth paving.

Shannon's tight joints and chamfered edges make this product a popular choice for pedestrianised areas in addition to trafficked locations. Its smooth surface and range of vibrant long lasting colours allow for design flexibility.

- Vibrant long-lasting colours
- Superb hard-wearing smooth surface
- Pencil chamfer significantly reduces maintenance
- Smooth surface is ideal for use with trolleys, cases etc.

 **PrimeTop**  **Ef-Stop**

**S**  
Smooth

Finish

  
Permeable


Also available as

  
Pedestrian Use

  
Machine Lay

Refer to relevant guidance in BS 7533

  
BIM Level 2



208 x 173mm

**Sizes**



173 x 173mm



208 x 173mm

**Duo Sizes**

Both sizes in one pack



50mm

**Depths**



# Shannon



## Specification

 **PrimeTop**®  **Ef-Stop**®

<b>Product type</b>	Concrete Paving Block
<b>Manufactured to</b>	BS EN 1338:2003
<b>Surface Layer</b>	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m <sup>3</sup> cement
<b>Surface Finish</b>	Smooth
<b>Chamfer</b>	Pencil Chamfer
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Strength</b>	Typical tensile splitting strength of >3.6MPa
<b>Slip/Skid risk</b>	Extremely Low
<b>Installed to</b>	BS 7533-3:2005
<b>BS</b>	<b>Plus</b> Q24 110 <b>Create</b> 45-20-64/400
<b>Tolerances on Dimensions (mm)</b>	Length ±2mm, width ±2mm, thickness ±3mm
<b>Abrasion Resistance</b>	Class 3
<b>Durability (Freeze-thaw)</b>	Class 3
<b>External Fire Performance</b>	Deemed to satisfy. See Commission Decision 2000/553/EC
<b>Reaction to fire</b>	Class A1
<b>Applications</b>	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from <a href="http://www.bsigroup.com">www.bsigroup.com</a>
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 12%
<b>Carbon Footprint</b>	<b>50mm</b> 18kgCo <sup>2</sup> e/m <sup>2</sup> <b>60mm</b> 22kgCo <sup>2</sup> e/m <sup>2</sup>
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>breem rating</b> <a href="http://www.bre.co.uk">www.bre.co.uk</a>	<b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A+</b> , can be achieved when used in conjunction with a prepared recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

### Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

### Email

[technical@tobermore.co.uk](mailto:technical@tobermore.co.uk)  
[sales@tobermore.co.uk](mailto:sales@tobermore.co.uk)

[tobermore.co.uk](http://tobermore.co.uk)

# Shannon



## Stock

product	size (mm)	colours available	in stock	m <sup>2</sup> per pack	m <sup>2</sup> per slice	no. per m <sup>2</sup>	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
<b>Shannon 50mm</b>	208 x 173 x 50	Bracken, Charcoal, Heather, Slate	YES	14.04	2.34	27.79	390	1638	1628
<b>Shannon Duo 50mm</b> (both sizes in one pack) <b>ML</b>	208 x 173 x 50 173 x 173 x 50	Bracken, Charcoal, Heather, Slate	YES	13.86	0.99	30.3	210 210	1617	1607
<b>Shannon 60mm</b>	208 x 173 x 60	Bracken, Charcoal, Heather, Slate	YES	12.96	2.16	27.79	360	1792	1782

ML - This product can be hand or machine laid.


### Heather




### Bracken



### Slate

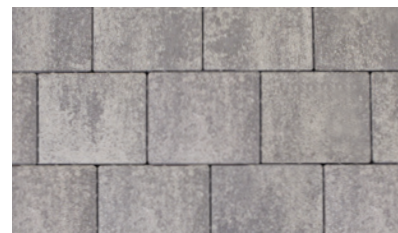

### Charcoal

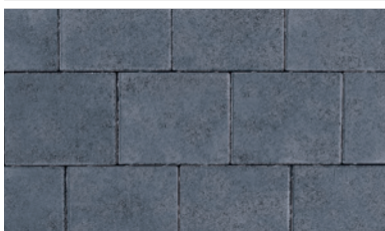

## Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

## Email

technical@tobermore.co.uk  
sales@tobermore.co.uk

[tobermore.co.uk](http://tobermore.co.uk)